
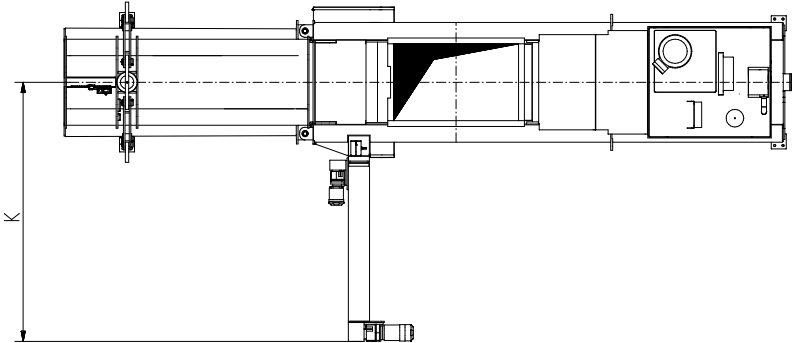
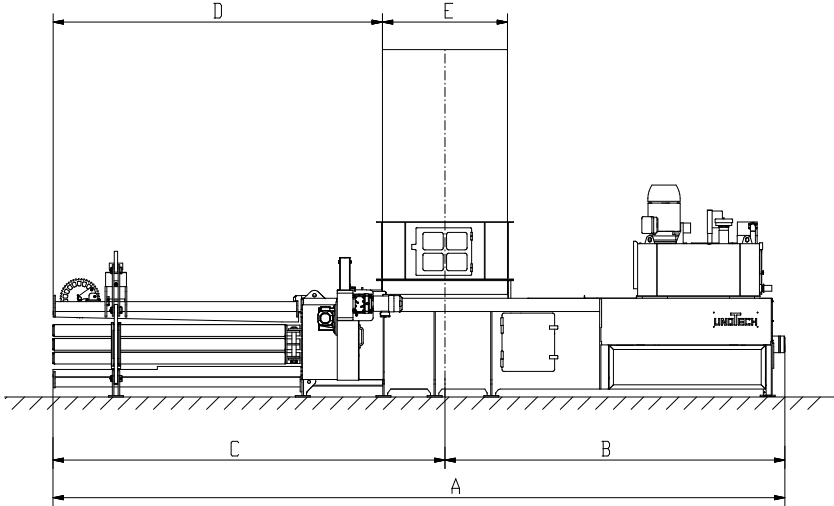


TECHNICAL DATA

UPAMAT-H	60 H 4	70 H 4	80 H 4	100 H 4	120 H 5	150 H 5
Pressing force	520 kN	600 kN	650 kN	800 kN	1.000 kN	1.300 kN
Max. cutting force	630 kN	720 kN	800 kN	990 kN	1.200 kN	1.500 kN
Specific pressing force	84 N/cm²	96 N/cm²	97 N/cm²	120 N/cm²	100 N/cm²	124 N/cm²
Feeding chute dimensions	1.250 x 920 mm	1.500 x 920 mm	1.600 x 1.020 mm	1.800 x 1.020 mm	2.000 x 1.020 mm	2.000 x 1.020 mm
Channel dimensions	750 x 1.000 mm	750 x 1.000 mm	750 x 1.100 mm	750 x 1.100 mm	1.100 x 1.100 mm	1.100 x 1.100 mm
Pump drive performance*	1 x 22 kW - 1 x 30 kW - 1 x 45 kW	1 x 30 kW - 1 x 45 kW - 1 x 75 kW	1 x 30 kW - 1 x 45 kW - 1 x 75 kW	1 x 75 kW - 2 x 45 kW	1 x 75 kW - 2 x 45 kW - 2 x 55 kW	2 x 45 kW - 2 x 55 kW - 3 x 55 kW
20-30 kg/m³	3,9 t/h 4,9 t/h 8,1 t/h	5,1 t/h 8,7 t/h 12,3 t/h	4,2 t/h 6,8 t/h 10,0 t/h	7,5 t/h 10,5 t/h	12,0 t/h 16,5 t/h 17,5 t/h	15,0 t/h 16,0 t/h 22,0 t/h
35-50 kg/m³	6,0 t/h 7,6 t/h 12,2 t/h	7,8 t/h 13,2 t/h 18,5 t/h	7,0 t/h 10,5 t/h 15,5 t/h	12,5 t/h 17,5 t/h	20,0 t/h 26,0 t/h 29,0 t/h	24,0 t/h 26,0 t/h 37,0 t/h
60 kg/m³	6,6 t/h 8,4 t/h 14,0 t/h	8,5 t/h 14,5 t/h 20,5 t/h	7,5 t/h 11,5 t/h 18,0 t/h	13,5 t/h 19,0 t/h	24,0 t/h 28,5 t/h 31,0 t/h	27,0 t/h 29,0 t/h 43,0 t/h
100 kg/m³	9,5 t/h 12,0 t/h 20,0 t/h	12,5 t/h 21,0 t/h 30,0 t/h	11,5 t/h 18,0 t/h 26,5 t/h	20,0 t/h 28,0 t/h	32,0 t/h 40,0 t/h 43,0 t/h	39,0 t/h 44,0 t/h 58,0 t/h
Bale weights**	350 - 500 kg	370 - 600 kg	500 - 700 kg	500 - 800 kg	800 - 1000 kg	1.100 - 1700 kg
Bale lengths	up to 1,80 m	up to 1,80 m	up to 2,00 m	up to 2,00 m	up to 2,00 m	up to 2,00 m
Baler weight	approx. 13 t	approx. 14,5 t	approx. 24 t	approx. 28 t	approx. 39 t	approx. 53 t

* in terms of bulk weight and drive rating ** dependent on bulk weight and bale length Subject to changes in design and dimensions!

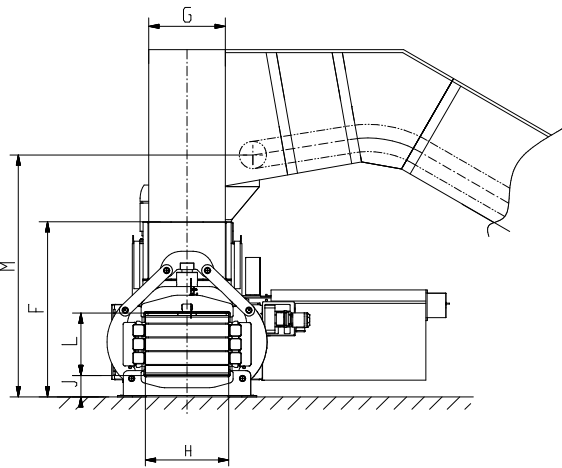

DIMENSIONS	A	B	C	D	E	F	G	H	J	K	L	M
60 H 4	8.287	3.713	4.574	3.949	1.250	2.100	920	1.000	255	3.166	750	2.900
70 H 4	8.787	4.088	4.699	3.949	1.500	2.100	920	1.000	255	3.166	750	2.900
80 H 4	10.745	5.409	5.336	4.536	1.600	2.700	1.020	1.100	385	3.257	750	3.500
100 H 4	11.772	5.836	5.936	5.036	1.800	2.700	1.020	1.100	385	3.257	750	3.500
120H5	13.500	6.800	6.700	5.700	2.000	3.200	1.020	1.100	600	3.700	1.100	4.000
150H5	13.500	6.800	6.700	5700	2.000	3.200	1.020	1.100	600	3.700	1.100	4.000